



KONICA MINOLTA

bizhub C3350

✓ Colour A4 multifunctional

✓ Up to 33 pages per minute

Functionality



Copying

- Colour
- Black & white



Printing

- Colour
- Black & white
- PCL/PS
- Local/Network
- USB



Scanning

- Colour
- Black & white
- Scan-to-eMail
- Scan-to-SMB
- Scan-to-FTP
- Scan-to-HDD
- Scan-to-USB
- Scan-to-WebDAV
- TWAIN Network



Faxing

- Super G3 Fax
- PC-Fax
- i-Fax




Giving Shape to Ideas


Technology

Emperon™ – print controller	Easily compatible to users and IT environments thanks to Konica Minolta unified print technology	✓
Simitri® HD – polymerised toner	Pays off to budget and green footprint by high quality and low environmental impact	✓
OpenAPI – solution platform	Enable efficient workflows throughout your MFP fleet by server-based applications	✓
i-Option – special feature	Increase the scope of MFP functionality from basic to advanced depending on your needs	✓
CSRC – remote service	Keep productivity up by online device and consumable monitoring of the Konica Minolta service	✓
IWS – panel customisation	Improved user-device interaction and productivity by full MFP panel customisation to your needs	X

Option diagram

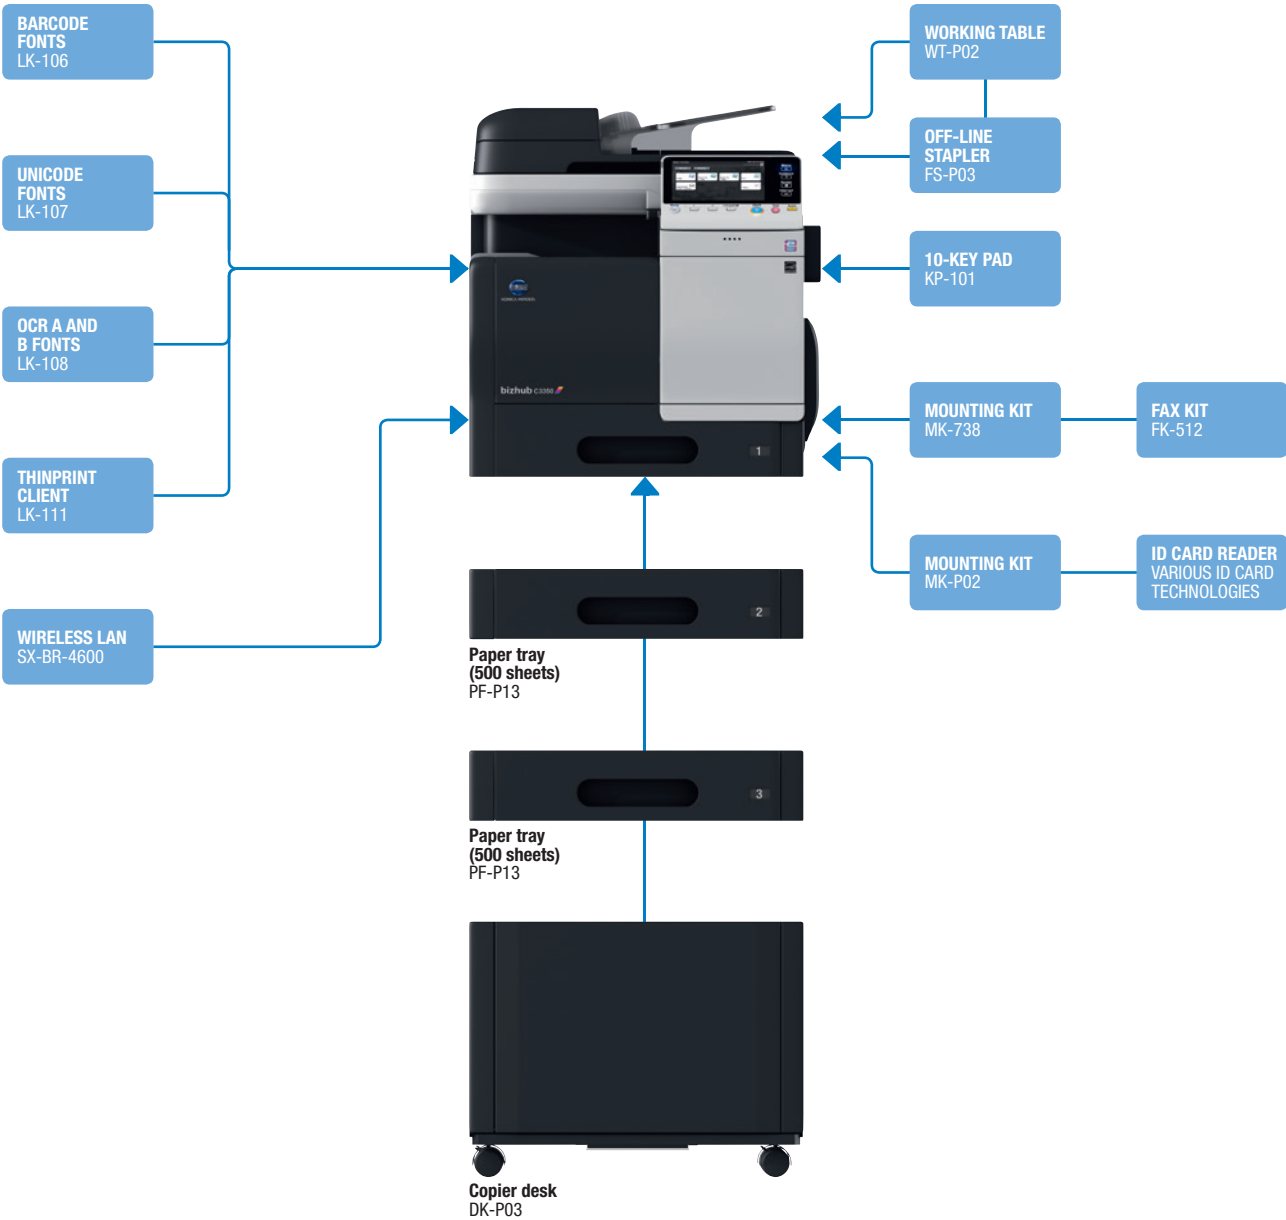

Finishing options



Descriptions

bizhub C3350	A4 multifunctional with 33 ppm b/w and colour. Standard Emperon™ print controller with PCL, PostScript and XPS support. Paper capacity of 550 sheets and 100-sheet manual bypass. Automatic duplex document feeder and duplex unit standard. 1 GB memory, 320 GB hard disk and Gigabit Ethernet standard.
PF-P13 Paper tray	A4, 500 sheets, 60–90 gsm
DK-P03 Copier desk	Provides storage space for print media, etc.
FS-P03 Off-line stapler	20-sheet corner stapling
KP-101 10-Key pad	For use instead of touchscreen

WT-P02 Working table	Off-line stapler placement, etc.
FK-512 Fax board	Super G3 fax, digital fax functionality
MK-738 Fax mount kit	Installation kit for fax board
ID card reader	Various ID card technologies
MK-P02 Mount kit	Installation kit for ID card reader
LK-106 Barcode fonts	Supports native barcode printing
LK-107 Unicode fonts	Supports native Unicode printing
LK-108 OCR A and B fonts	Supports native OCR A and B font printing
LK-111 ThinPrint® client	Print data compression for reduced network impact
SX-BR-4600 Wireless LAN	Wireless LAN to network connector

Technical specifications

SYSTEM SPECIFICATIONS

System memory	1 GB (standard)
System hard disk	320 GB (standard)
Interface	10-Base-T/100-Base-TX/1,000-Base-T Ethernet; USB 2.0
Network protocols	TCP/IP (IPv4/IPv6); SMB; LPD; IPP; SNMP; HTTP; HTTPS
Frame types	Ethernet 802.2; Ethernet 802.3; Ethernet II; Ethernet SNAP
Automatic document feeder	Up to 50 originals; A5–A4; 50–128 gsm; reverse automatic document feeder
Printable paper size	A6–A4, customised paper sizes
Printable paper weight	60–210 gsm
Paper input capacity	Standard: 650 sheets Max.: 1,650 sheets
Tray 1	550 sheets, A6–A4, 60–210 gsm
Tray 2 (optional)	500 sheets, A4, 60–90 gsm
Tray 3 (optional)	500 sheets, A4, 60–90 gsm
Manual bypass	100 sheets, A6–A4, custom sizes, 60–210 gsm
Automatic duplexing	A4; 60–210 gsm
Finishing modes (optional)	Staple (off-line)
Output capacity	Max.: 250 sheets
Stapling (optional)	Max.: 20 sheets (off-line stapling)
Copy/print volume (monthly)	Rec.: 6,500 pages Max. ¹ : 120,000 pages
Toner lifetime	CMYK: 10,000 pages
Imaging unit lifetime	CMYK: 50,000 pages
Power consumption	220–240 V/50/60 Hz, Less than 1.7 kW
System dimensions (W x D x H)	555 x 584 x 603 mm
System weight	Approx. 47.5 kg

COPIER SPECIFICATIONS

Copying process	Electrostatic laser copy, tandem, indirect
Toner system	Simitri® HD polymerised toner
Copy/print speed A4 (mono/colour)	Up to 33 ppm
Autoduplex speed A4 (mono/colour)	Up to 33 ppm
1st copy out time (mono/colour)	9.0 sec. 10.0 sec.
Warm-up time	Approx. 30 sec. ²
Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1–999
Original format	Max. A4
Magnification	25–400% in 0.1% steps; auto-zooming
Copy functions	Electronic sorting; multi-job; adjustments (contrast, sharpness, image density); proof copy; interrupt mode; colour mode; separate scan; sort/group; combination; original selection; ID card copy; 2-in1; 4-in-1

PRINTER SPECIFICATIONS

Print resolution	600 x 600 dpi 1,200 x 1,200 dpi (reduced speed)
Page description language	PCL 5e/c Emulation, PCL XL Ver. 3.0 Emulation, PostScript 3 Emulation (3016), XPS Ver. 1.0, OpenXPS, PDF 1.7
Operating systems	Windows XP (32/64) Windows Vista (32/64) Windows 7 (32/64) Windows 8 (32/64) Windows Server 2003 R2 (32/64) Windows Server 2008 (32/64) Windows Server 2008 R2 Windows Server 2012 Macintosh OS X Ver. 10.2.8 or later Linux
Printer fonts	80 PCL Latin; 137 PostScript 3 Emulation Latin
Print functions	Direct print of TIFF, XPS, PDF and OOXML (DOCX, XLSX, PPTX); secure print; combination; n-up; poster; booklet page order; watermark

¹ If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed

² Warm-up time may vary depending on the operating environment and usage

